



Терминалы серии PUE RADWAG

Модели PUE 7.1, PUE 7.1P

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93

PUE 7.1 MEASURING INDICATOR



Terminal PUE 7.1 series is designed for extension of industrial scales.

PUE 7.1 features 5.7" colourful graphic touch screen display and membrane keypad. Two proximity sensors with programmable functionality offer hands-free operation.

PUE 7.1 enables plugging a set of peripherals, including: barcode scanners, receipt and label printers, transponder card readers and typical PC equipment (keyboard, mouse etc.).

The terminal supports 1 weighing platform in standard version.


Infrared proximity sensors

Optional functions:

- PRINT function
- TARE function
- sensor's sensitivity adjustment



Interface communication




Technical specification:





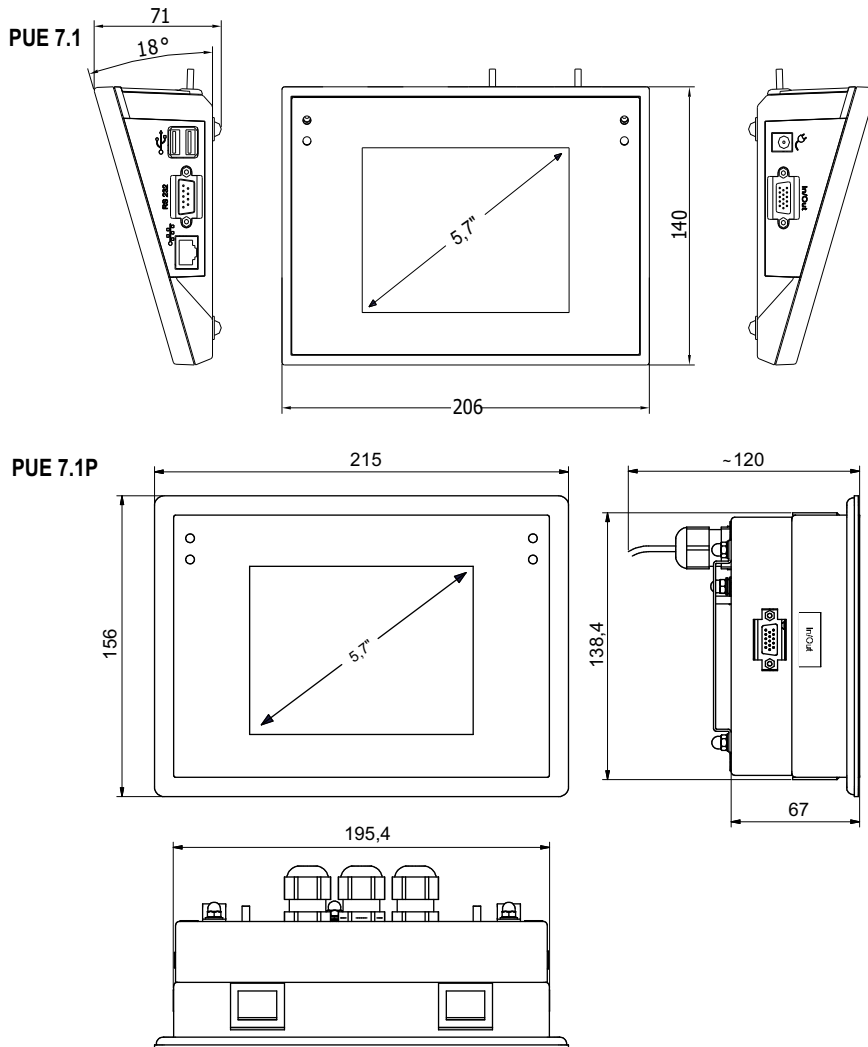

	PUE 7.1	PUE 7.1P
Housing	ABS plastic	stainless steel
IP rating	IP 43	front - IP 66/67 construction - IP 32
Power supply	10 ÷ 28 VDC, max 1A	
Display	TFT (640x480) 5,7" with touch panel	
Keypad	touch screen	
Number of buttons	8 keys	
Operation Temperature	-10°C ÷ 40°C	
Atmospheric humidity	10 ÷ 85 % RH no condensation	
OIML class	-	
Maximum number of verification intervals	-	
Maximum input signal increase	19,5 mV	
Maximum voltage per verification interval	3,25 µV	
Minimum voltage per verification interval	0,4 µV	
Minimum tensometer impedance	50 Ω	
Maximum tensometer impedance	1200 Ω	
Tensometer bridge excitation voltage	5 V	
Programmable IR sensors	2	
Number of platforms	Max. 2	
Additional weighing platform module	metrological parameters as in the main weighing platform - option	
Interfaces	2×RS 232, 2×USB, Ethernet, Wireless Module, 4 Inputs / 4 Outputs (digital)	2×RS 232, 2×USB, Ethernet, 4 Inputs / 4 Outputs (digital)
Processor	NVIDIA Cortex A9 2×1 GHz	
Memory	RAM 256 MB	
Database memory	micro SD 8 GB	
Operation System	Windows CE 7.0	

PARAMETERS IN/OUT	IN 1 ÷ OUT 4	IN 1 ÷ OUT 4
Type of IN/ OUT	Reed relay type NO	Opto-isolated
Wire cross-section	0,14 ÷ 0,5 mm ²	
Maximum switching current	200 mA DC	
Maximum forward voltage	50 V DC	
Range of Control voltage	5 + 24 V DC	

Dimensions:



FUNCTION:

-  Parts counting
-  Labeling
-  Dosing
-  Totalizing
-  Checkweighing
-  Percent deviations
-  Statistics
-  Formulation
-  PGC control
-  Animal weighing
-  Destiny determination
-  Differential weighing
-  Peak hold
-  ALIBI Memory

Accessories:

Impact printer:	Bar code scanner:
- EPSON TM-U220D	- LS2208
- EPSON TM-U220B	- PowerScan D8330
- EPSON TM-U220A	- PowerScan M8300
Label printer:	Transponder card reader:
- CITIZEN CL-S521	- CK-01/4
- CITIZEN CL-S621	- CK-02/4
- CITIZEN CL-S631	Cables:
- CITIZEN CL-S700	- Scale - computer – P0108
- CITIZEN CL-S700R	- EPSON Printer – P0151
- ZEBRA GK 420d	- CITIZEN Printer – P0151
- ZEBRA GK 420t	- ZEBRA Printer – P0183
- ZEBRA GX 420t	- Bar code scanner LS2208 DSUB15 – PT0129
- ZEBRA GX 430t	- Bar code scanner LS2208 DB9 – PT0242
- ZEBRA ZT 220	- Cable 4in/4out – PT0128
- ZEBRA ZM 400	



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93