



Терминалы серии PUE RADWAG

Модели PUE 5.15, PUE 5.19

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93

TERMINALS PUE 5.15, PUE 5.19



Cutting edge terminals PUE 5.15 and PUE 5.19 series are continuation of a well established model line PUE 5. They offer far greater application possibilities comprised in two solutions:

- **PUE 5.15** (featuring a panoramic 15,6" touch screen display operating with resolution 1366 x 768 pixels);
- **PUE 5.19** (featuring a 19" touch screen display operating with resolution 1280 x 1024 pixels).

The terminals are intended for designing scales with maximum resolution of 6000 e. PUE 5.15 and PUE 5.19 series, similarly to their prior versions, are enclosed in a stainless steel housing which allows for reaching the highest IP rating, i.e. IP 67. The terminals are powered by mains 100 ÷ 240 VAC, 50 ÷ 60 Hz.

The terminals come standard with interfaces: 2 x RS232, 1 x RS485, 2 x Ethernet, 4 x USB 2.0.

PUE 5.15 and PUE 5.19 series can be extended by additional 3 weighing modules for simultaneous operation of maximum 4 weighing platforms. Optional PROFIBUS DP interface enables terminal cooperation with ProfiBus industrial network.

Technical specification:

	PUE 5.15	PUE 5.19
Housing	stainless steel	
Display	LCD 15,6" (1366x768)	LCD 19" (1280x1024)
Touch screen	Infrared controlled panel (standard) or resistive touch panel (option)	
IP rating	IP 67 - version with infrared controlled panel / IP 68 - version with resistive touch panel	
Power supply	100 ÷ 240V AC 50 ÷ 60Hz	
Power consumption	50W	
Working / Storage temperature	work 0°C ÷ +40°C, storage -20°C ÷ +60°C	
Maximum quantity of divisions from converter	8 388 608	
OIML class	III	
Maximum quantity of verifying units	6 000	
Maximum signal increment	19,5 mV	
Maximum voltage per 1 verification unit	3,25 µV	
Minimum voltage per 1 verification unit	0,4 µV	
Minimum load cell impedance	80 Ω	
Maximum load cell impedance	1200 Ω	
Power voltage on load cell	5 V	
Load cells connection	4 or 6 conductors (shielded)	
Processor	Intel® Celeron® (2GHz, quad-core, 2MB cache)	
Chipset	Intel® HD Graphics Gen 7	
RAM memory	4GB DDR3L 1333MHz max 8GB	
Data memory	SSD 60GB mSATA	
STANDARD FEATURES:		
Ethernet	2 x 10/100/1000 Mbit (2 x RJ45 hermetic **)	
Serial interfaces	2 x RS 232, 1 x RS 485 (2 x M12 8P **)	
USB port	4 x USB 2.0 (2xUSB A ***, 2xM12 4P **, load-carrying capacity up to 500mA)	
OS	Microsoft Windows 7 Embedded	
ACCESSORIES:		
Additional weighing platform module	Additional 3 pieces (metrological parameters as in the main weighing platform)	
Inputs / Outputs	4 inputs / 4 outputs (2 x M12 8P sockets **) or (2 x cables fed through gland)	
Interface Profibus DP	operation mode: slave (***) (2 x M12 5P sockets coding B **)	
External buttons PRINT, TARE, START	terminal with 4 IN/4OUT (M12 8P sockets **) required	

* - 4 GB RAM as an option, on customer's request


** - Tightness provided with dust cover or cable mount installed

*** - Tightness provided with dust cover installed, tightness cannot be provided when accessories are connected (pendrive, keyboard, mouse, etc.)


**** - Interface Profibus DP is installed interchangeably with the RS 485 interface (they do not occur simultaneously!)

Dimensions:

PUE 5.15

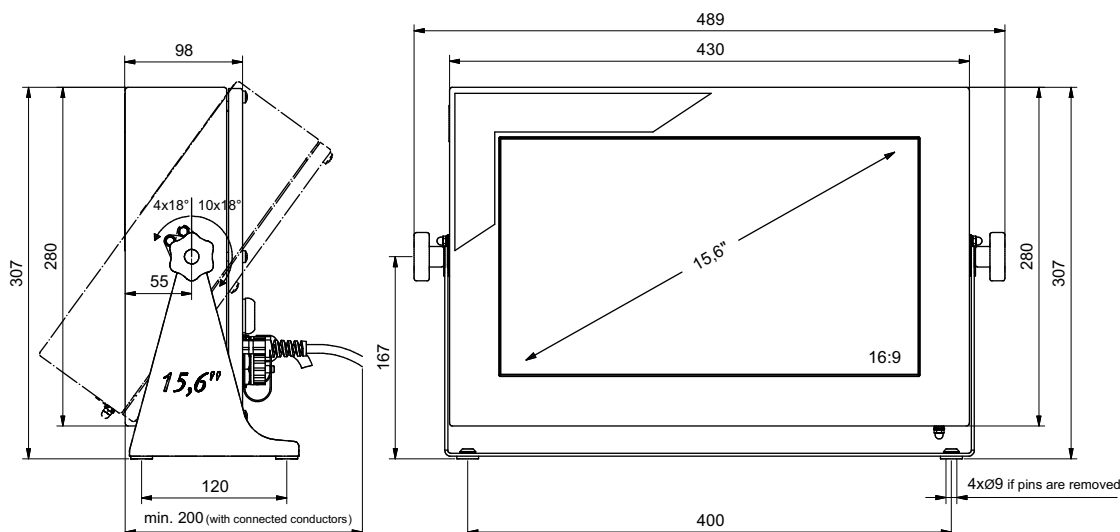

PUE 5.19

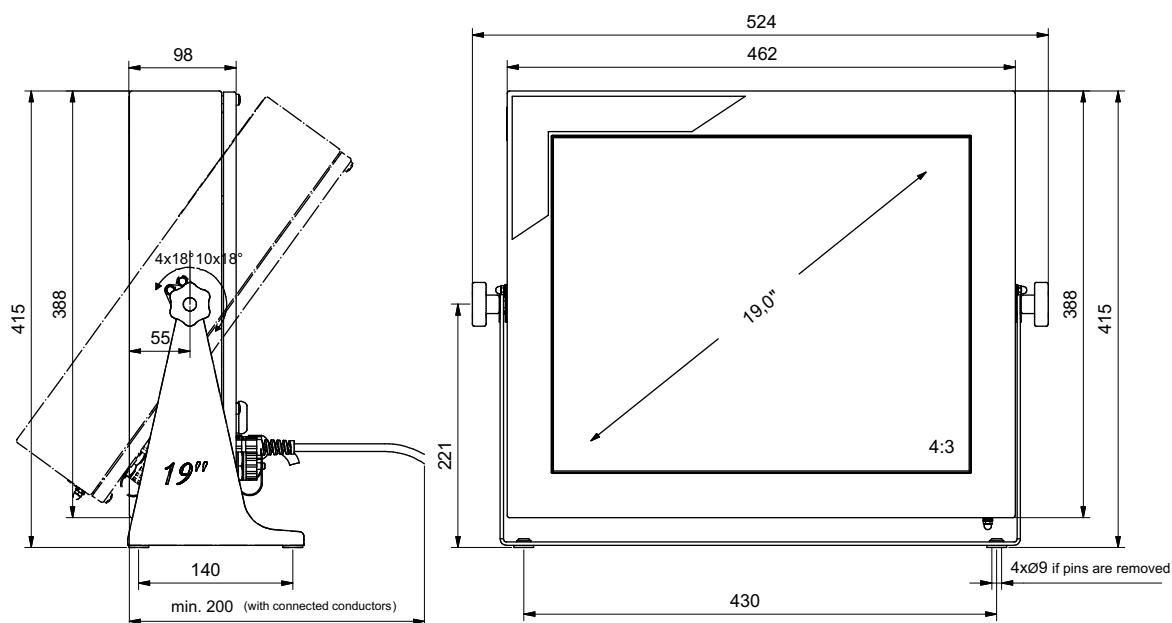

Additional equipment:

Impact printers:

EPSON TM-U220D – basic version
 EPSON TM-U220B – with paper cutter
 EPSON TM-U220A – with paper cutter and copy winder

Label printers:

CITIZEN CL-S521
 CITIZEN CL-S621
 CITIZEN CL-S631
 CITIZEN CL-S700
 CITIZEN CL-S700R
 ZEBRA GK 420d
 ZEBRA GK 420t
 ZEBRA GX 420t
 ZEBRA GX 430t
 ZEBRA ZT 41042

Barcode readers:

LS2208 – intended for standard operating conditions
 PowerScan D8330 – intended for severe operating conditions IP56
 PowerScan M8300 – intended for severe operating conditions IP56 radio version

Transponder card readers:

CK-01/3
 CK-02/3

Cables:

Cable PT0212 – Ethernet
 Cable PT0087 – for EPSON, CITIZEN printers and other on USB
 Cable PT0019 – for EPSON, CITIZEN printers, via RS232
 Cable PT0022 – for ZEBRA printers
 Cable PT0020 – cable RS232
 Cable PT0213 – for PRINT, TARE, START buttons (terminal with 4IN/4OUT required - M12 8P connectors)



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93